

SOUTHWEST KANSAS GROUNDWATER MANAGEMENT DISTRICT No. 3

Resolution

WHEREAS, the Southwest Kansas Groundwater Management District No. 3 has adopted as a part of its Management Program as policy a minimum well spacing of  $\frac{1}{2}$  mile, except for the spacing of domestic wells, as a guide for location of new wells within the district, and

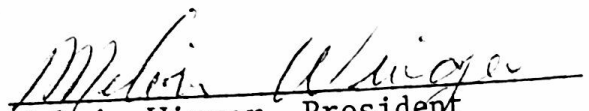
WHEREAS, there has developed a need for further guidance in this regard,

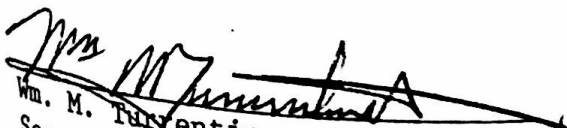
THEREFORE, BE IT RESOLVED that the Board of Directors of the Southwest Kansas Groundwater Management District No. 3 interpret the  $\frac{1}{2}$  mile in the district well spacing policy as a nominal  $\frac{1}{2}$  mile not to be less than 2300 feet.

BE IT FURTHER RESOLVED that the Board of Directors of the Southwest Kansas Groundwater Management District No. 3 make their recommendations on requests for a change of point of diversion for the purpose of replacing a well to be abandoned on the following:

A replacement well may be located no more than 1320 feet from the original point of diversion, except that the proposed location must not decrease the spacing between any existing wells, except domestic, within  $\frac{1}{2}$  mile by more than 300 feet. In addition, the proposed location must be 2300 feet or more to wells outside the  $\frac{1}{2}$  mile distance.

Resolution adopted on August 11, 1976.

  
Melvin Winger, President  
Board of Directors  
Southwest Kansas Groundwater  
Management District No. 3

  
Wm. M. Fuxentine  
Secretary, Board of Directors  
Southwest Kansas Groundwater  
Management District No. 3